

Oil Vapour Monitor - Permanent

Oil Vapour/ Dewpoint / Pressure / Temperature - four-in-one measurement
PUR series

Key Features

- Four-in-One measurement – oil vapour, dewpoint, pressure, & temperature
- Measurement Ranges:
 - Oil Vapour: 0.001 to 5.000 mg/m³
 - Dew Point: -110 to +20°C
 - Pressure: 0 to 17 bar
 - Gas Temperature: 0 to +50°C
- Air Purity Classes:
 - ISO 8573-5 class for oil vapour
 - ISO 8573- 3 class for moisture (dew point)
- 7" touch screen display
 - 2 Alarm relays: Oil Vapor and Dewpoint
 - Data logging with 25 GB of storage
- Data output
 - No display: 4-20mA and Modbus RTU (RS485)
 - With Display: 4-20mA, Modbus RTU (RS485), Modbus TCP (Ethernet) & USB (csv format)
- Power Supply: 100 to 240 VAC, Max 65 W



Oil vapour monitor
with display

About

The Oil Vapour Monitor does more than measure oil vapour. It also (i) monitors pressure dewpoint, gas pressure and gas temperature and (ii) gives the oil vapour class and moisture class based on the principles of ISO8573-3 and ISO8573-5.

The device has excellent repeatability and stable performance. The automatic calibration and self-cleaning ensures reliable accuracy and extended sensor life. Easy to install via 6 mm PTFE tube and quick-connect tube fittings.

The optional 7" touchscreen provides real-time information, data recording, on-screen alarms and USB export (CSV format). With 25 GB of onboard storage, users can perform data analysis directly on the screen or download data to their computer for further analysis.

Applications

- Manufacturing, pharmaceutical, food & beverage, industrial use
- Compressed air and inert gases
- Temporary or permanent installation



More Info

Specifications

Oil Vapour

Measuring Range	0.001 ... 5.000 mg/m ³
Accuracy	±1.5%RD + 0.003 mg/m ³
Resolution	0.001

Dew Point

Measuring Range	-110 to +20 °Ctd 166°F to +68°F
Accuracy	±2 °Ctd (-60 ... +20 °Ctd) ±3 °Ctd (-110 ... -60 °Ctd)

Pressure

Measuring Range	0 to 1.7 Mpa(a) 0 to 246 psi
Accuracy	±0.3 %FS @ 23°C
Resolution	0.01

Temperature


Measuring Range	0 to +50 °C 32°F to +122°F
Accuracy	±0.3 °C
Resolution	0.01

Power

Supply Voltage & Power	100 to 240 VAC Max 65 W
Power Supply	Included

Display & Data Logger (optional)

Display	7" IPS touch LCD
Resolution	1280 × 800 px
Data Logging Storage	25 GB 3,000,000,000 values
Data Export	USB Type-C (csv file) Modbus RTU (RS485) Modbus TCP (Ethernet)
Alarm Output	2 × Relay alarm channel (Oil Vapor, Dewpoint)

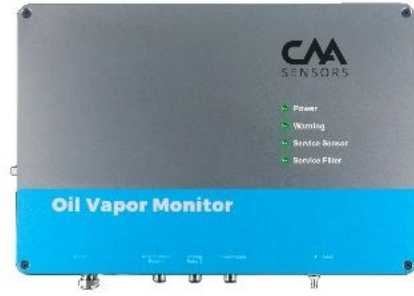

Oil vapour monitor
no display

Signal Output

Analogue Output	4-20mA (1 signal only)
Digital Output	
• with display	Modbus RTU (RS485) and Modbus TCP (Ethernet)
• no display	Modbus RTU (RS485) only


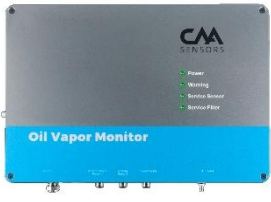
Operating Environment

Measuring Medium	Compressed air and non-corrosive, non-explosive gases
Medium Temperature	0 to +50 °C 32°F to +122°F
Medium Pressure	0.3 to 1.7 Mpa(a) 0 to 246 psi
Relative Humidity	0 to 40 %RH (Non-condensing) @20°C, 100KPa
Sample Gas Flow Rate	0.5 to 2 NL/min
Environment Temp	-20 to +45 °C -4 to +113°F
Storage Temp	-20 to +45 °C -4 to +113°F



Other

Zero Filter Life Time	2 Year @ 2 ppm
UV Lamp Life Time	8,000 hours
Case Material	Aluminium Alloy
Weight	10kg
Dimensions	445 × 319 × 177 mm
Installation	Permanent or Temporary
Warranty	12 months
HS Code	9031.80

Comparison


Feature	Permanent Unit with Display	Permanent Unit no Display
SKU	PUR11000x	PUR12000x
		
Measurement - Oil Vapour	✓	✓
Measurement - Dew Point	✓	✓
Measurement - Pressure	✓	✓
Measurement - Gas Temp	✓	✓
ISO 8573-5 class for oil vapour	✓	✓
ISO 8573- 3 class for moisture (dew point)	✓	✓
Display	✓	✗
Data Logging	✓	✗
Alarm Relay	✓	✗
Data Output	4-20mA Modbus RTU (RS485) Modbus TCP (Ethernet) USB	4-20mA Modbus RTU (RS485)
Mounting	Wall Mount (permanent)	Wall Mount (permanent)

Display

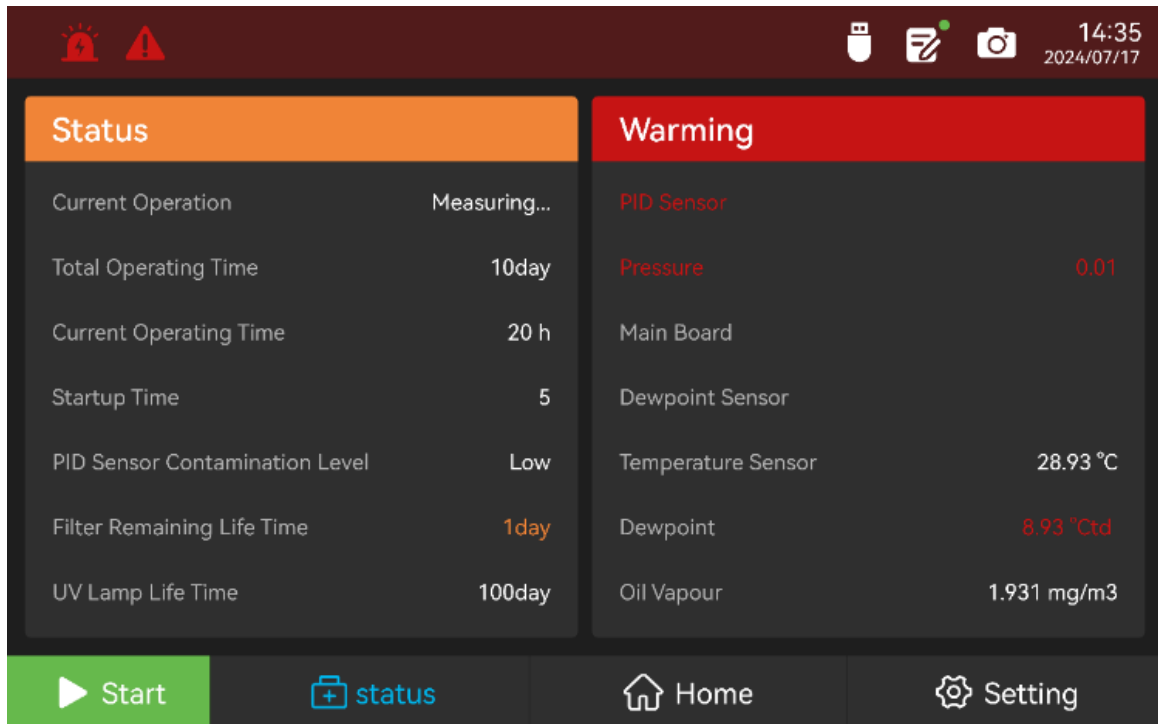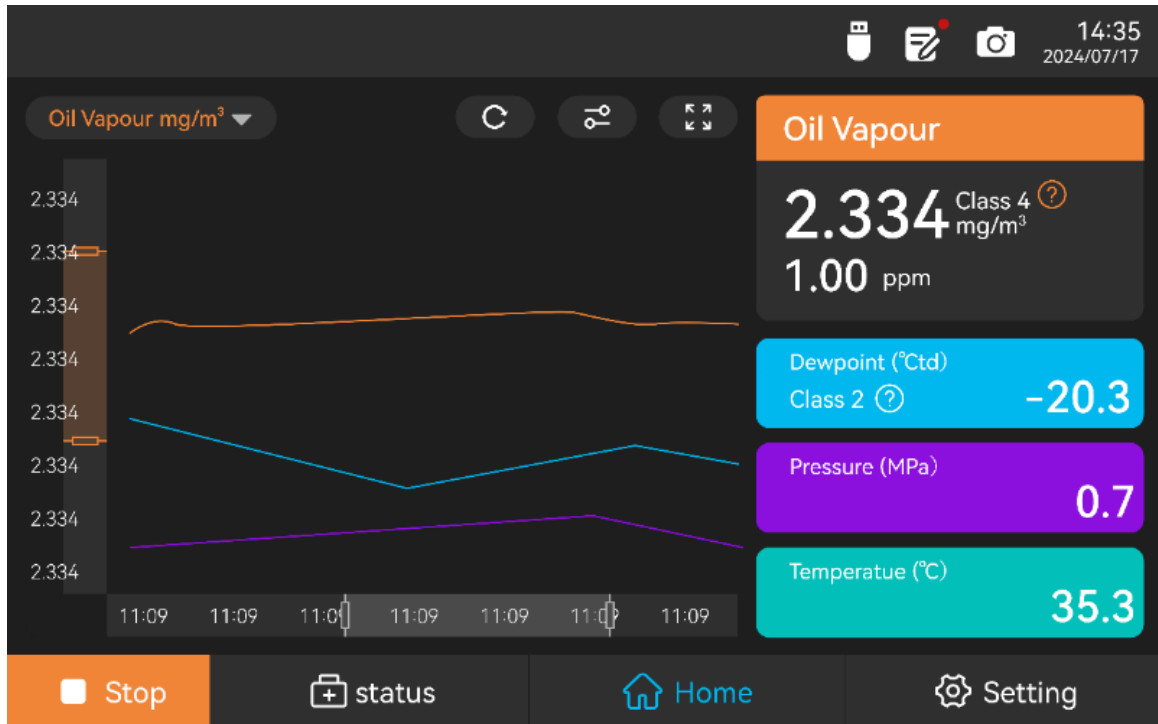


Dimensions


Dimensions: 445 × 319 × 177 mm (L×W×H), Weight: 10kg

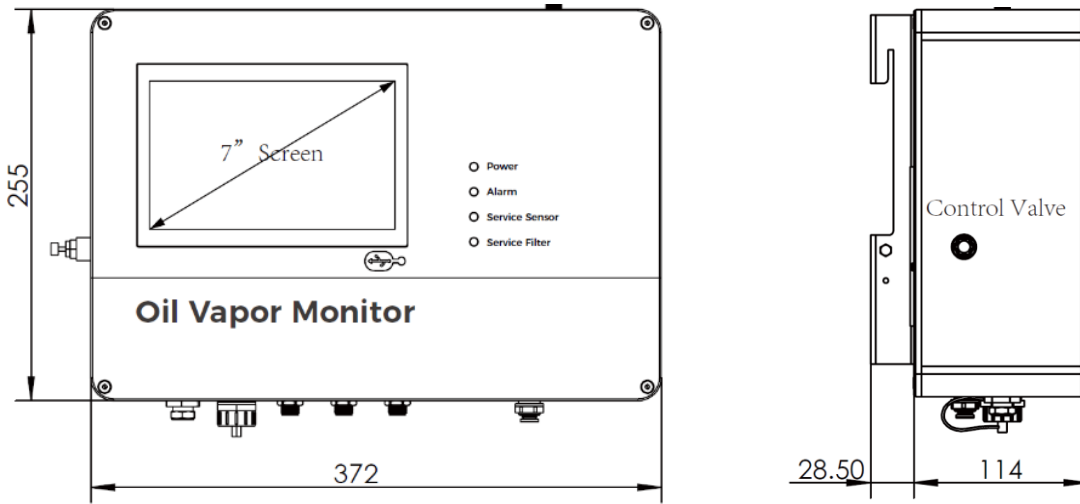

How to Order

Find a Distributor: www.caasensors/distributors

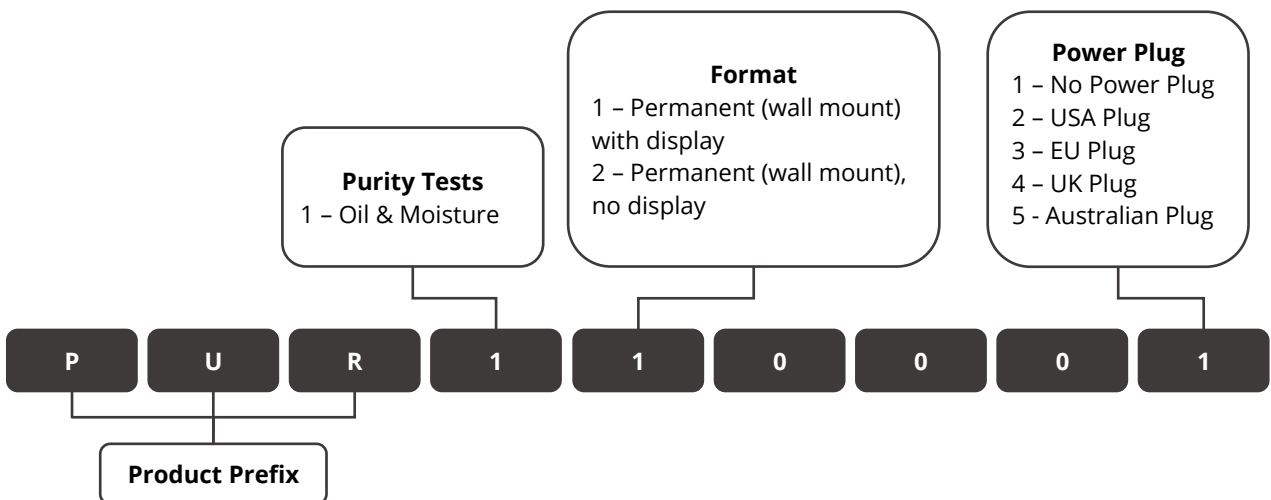

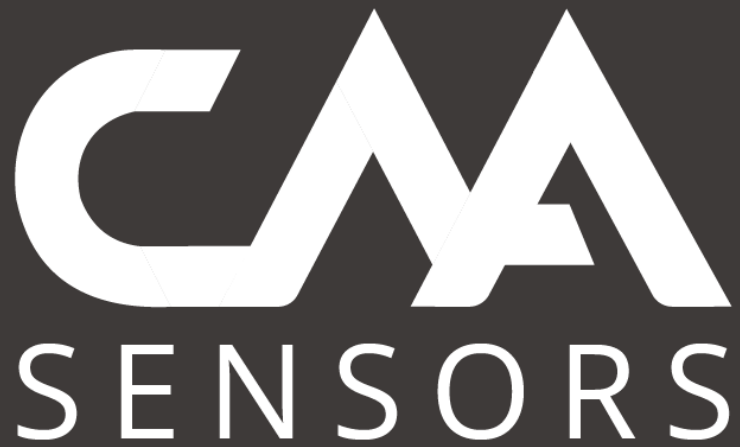

CAA Sensors Pty Ltd

Head Office: Sydney, Australia

Email: sales@caasensors.com

Website: www.caasensors.com

Find a Distributor: www.caasensors.com/distributors